NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WARTIME REPORT

ORIGINALLY ISSUED

March 1945 as
Advance Restricted Report L5C09

SPIN-TUNNEL TESTS OF AIRPLANE MODELS WITH EXTREME

VARIATIONS IN MASS DISTRIBUTION

ALONG THE THREE BODY AXES

By Robert W. Kamm

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

NACA

WASHINGTON

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ADVANCE RESTRICTED REPORT

SPIN-TUNNEL TESTS OF AIRPLANE MODELS WITH EXTREME

VARIATIONS IN MASS DISTRIBUTION

ALONG THE THREE BODY AXES

By Robert W. Kamm

SUMMARY

An investigation was conducted in the Langley 15-foot and 20-foot free-spinning tunnels to determine the effect of extreme changes in mass distribution along each of the three body axes. Two models of single-engine airplanes having different geometric arrangements and aerodynamic characteristics were tested with a series of different loadings. The test results were analyzed to investigate the effects of the individual inertia moment parameters upon spin and recovery characteristics.

The test results indicated that the value of the inertia yawing-moment parameter mainly determined the effect of aileron setting on recovery, that the values of the inertia yawing-moment and inertia rolling-moment parameters influenced the effect of elevator setting on recovery, and that the value of the inertia pitching-moment parameter determined the attitude of the spin at the normal spinning control configuration (ailerons neutral, elevators up, and rudder full with the spin) when mass was distributed chiefly along the wing. The inertia pitching-moment parameter also determined the angular velocities of the spins. Steady spins could not be maintained when all three moments of inertia were equal.

INTRODUCTION

Existing literature on spinning indicates that mass distribution may greatly affect the spin and recovery characteristics of a given airplane. Some of the previous

investigations of the effect of mass distribution on
spinning have been presented in references 1 to 5.

The previous work has indicated that the mass distri-
bution of airplanes determines the relative effectiveness
of the various controls in producing recovery from spins.
Although geometric characteristics have affected the
number of turns for recovery from a spin, they generally
have not influenced the relative effectiveness of the
controls in producing recovery for a given loading condi-
tion.

Reference 1 indicates that the inertia yawing-moment
parameter may be used to predict the relative effectiveness
of various control settings and movements on recovery.
In reference 2 it is indicated that multiengine models
spin steeply, that aileron-against settings expedite
recovery, and that the elevator is the most effective
single control for recovery. Multiengine models have
relatively more mass along the wing and less mass along
the fuselage than single-engine models; that is, the
inertia yawing-moment parameter is positive for multi-
engine models and is generally negative for single-engine
models. Single-engine models may spin either steeply or
flatly, aileron-with settings expedite recovery, and the
rudder is the most effective single control for recovery.
It was shown in reference 3 that, when the loading along
the wings was increased for several single-engine models
until the inertia yawing-moment parameter was positive,
control effects typical of multiengine models were
obtained but the spins were not so steep as the spins that
are characteristic of multiengine models.

Inasmuch as previous work indicated the effect of
only the inertia yawing-moment parameter, the present
investigation was conducted in the Langley 15-foot and
20-foot free-spinning tunnels in an attempt to determine
the effects of the inertia rolling-moment and inertia
pitching-moment parameters. A primary purpose of this
investigation was to determine which inertia moment
parameter determines the attitude of the spin. The scope
of some of the previous investigations is shown in
figure 1, which indicates the envelopes of the inertia
moment parameters of the models considered in the investi-
gations of references 1 to 3. The inertia moment param-
eters of most of the models of conventional airplanes
tested in the Langley spin tunnels since the investi-
gation described in reference 1 lie within or quite close

to the envelope indicated for reference 1. Figure 1
also shows the loading conditions as represented by the
inertia moment parameters with which the models were
tested in the present investigation. Very extreme
changes in the loading along the three body axes were
made in the present investigation with the hope that the
results obtained at the extreme conditions would be of
aid in isolating the effects of the individual inertia
moment parameters. Additional tests were made with the
moments of inertia about the three body axes equal in
order to determine the effect of zero inertia moment
parameters. Tests were also made to determine the effect
of increasing all moments of inertia by equal amounts
and thus keeping the moment-of-inertia differences
constant. Two models having different geometric charac-
teristics were tested in order to determine whether
aerodynamic differences would influence the effect of
the large loading changes.

The effects of control settings on the steady-spin
and recovery characteristics were determined for the
various loadings. The center-of-gravity location was
held fixed, and the total weight was kept constant
for each model during the test program. All tests were
made with the landing gear and flaps retracted.

SYMBOLS

X, Y, and Z	airplane body axes
m	mass, slugs
b	wing span, feet
S	wing area, square feet
I_X	moment of inertia about X-axis, slug-feet^2
I_Y	moment of inertia about Y-axis, slug-feet^2
I_Z	moment of inertia about Z-axis, slug-feet^2
k_X	radius of gyration about X-axis, feet
k_Y	radius of gyration about Y-axis, feet

k_Z radius of gyration about Z-axis, feet

V   airplane true rate of descent estimated by
                   scaling from model values, feet per second

α acute angle between thrust axis and vertical
                   (approx. equal to absolute value of angle
                   of attack at plane of symmetry), degrees

$\emptyset$ angle between Y-axis and horizontal, degrees

Ω airplane angular velocity about spin axis
                   estimated by scaling from model values,
                   radians per second

ρ density of air, slugs per cubic foot

p   angular velocity about X-axis, radians per
                   second

q   angular velocity about Y-axis, radians per
                   second

r   angular velocity about Z-axis, radians per
                   second

t   time, seconds

$\dfrac{k_X{}^2 - k_Y{}^2}{b^2}$ inertia yawing-moment parameter

$\dfrac{k_Y{}^2 - k_Z{}^2}{b^2}$ inertia rolling-moment parameter

$\dfrac{k_Z{}^2 - k_X{}^2}{b^2}$ inertia pitching-moment parameter

EQUATIONS OF MOTION APPLICABLE TO SPINNING

If the airplane body axes are assumed to coincide
with the principal axes, as is very nearly the case for

conventional airplanes, Euler's equations for the moments acting on a rotating body may be written for an airplane in a spin as

Inertia yawing moment = - Aerodynamic yawing moment

$$= (I_X - I_Y)pq - I_Z \frac{dr}{dt}$$

Inertia rolling moment = - Aerodynamic rolling moment

$$= (I_Y - I_Z)qr - I_X \frac{dp}{dt}$$

Inertia pitching moment = - Aerodynamic pitching moment

$$= (I_Z - I_X)pr - I_Y \frac{dq}{dt}$$

In a steady spin, the acceleration terms (the last terms in the equations) disappear; the formulas indicate, therefore, that the individual moments of inertia may affect recoveries although they should have no effect on the steady spin. The moment-of-inertia differences determine the inertia moments acting during a steady spin at a given attitude and given angular velocities. These differences may be expressed nondimensionally by the inertia moment parameters

$$\frac{I_X - I_Y}{mb^2} \qquad \frac{I_Y - I_Z}{mb^2} \qquad \frac{I_Z - I_X}{mb^2}$$

or by

$$\frac{k_X^2 - k_Y^2}{b^2} \qquad \frac{k_Y^2 - k_Z^2}{b^2} \qquad \frac{k_Z^2 - k_X^2}{b^2}$$

APPARATUS AND TESTS

Apparatus and Geometric Characteristics of Models

Testing technique and construction of spin models are described in reference 6. Dimensions of the airplanes represented by the two models used for the present tests are given in table I. Three-view drawings of the

models, which are designated A and B, are presented in figures 2 and 3, and photographs of the models are given as figures 4 and 5. The tests were made with the landing gear retracted. Model A represents a recent scout-bomber airplane and model B represents a recent experimental fighter design. The scales were 1/18 for model A and 1/20 for model B.

Mass Loadings Tested

The initial loading conditions of the models, as represented by the inertia moment parameters, were almost the same. In order to obtain the other loading conditions tested, lead ballast was redistributed along the three body axes. The total weight of each model and the center-of-gravity location were held constant. Extending or retracting mass along any one axis increases or decreases the moments of inertia about the other two axes and therefore changes two of the inertia moment parameters, as is shown by the following table:

Extending mass along	Change in			Algebraic change in		
	I_X	I_Y	I_Z	$\dfrac{k_X^2 - k_Y^2}{b^2}$	$\dfrac{k_Y^2 - k_Z^2}{b^2}$	$\dfrac{k_Z^2 - k_X^2}{b^2}$
X-axis	--------	Increase	Increase	Decrease	--------	Increase
Y-axis	Increase	--------	Increase	Increase	Decrease	--------
Z-axis	Increase	Increase	--------	--------	Increase	Decrease

The three inertia moment parameters therefore are interrelated, and any two parameters determine the third. It is impossible to vary only one parameter at a time and determine its effect.

In most cases it was impossible to make the desired retraction of mass along any one axis, and accordingly changes that gave the desired values of the inertia moment parameters were obtained by extending mass along the other two axes. In order to change appreciably the mass distribution along the Z-axis, weights were installed on rods that passed through the center of gravity and projected into the air stream. Tests indicated that the effect of the rods on the spin and recovery characteristics was small.

    In tables II and III, which show the various loading
conditions simulated on models A and B, respectively, the
actual changes made to obtain the various loadings and
the effective changes thus simulated are given. Tests
for models A and B were made at equivalent spin altitudes
of 6000 and 8000 feet, respectively.

<center>Accuracy</center>

    Because the models were damaged frequently during
the tests, it was recognized that the results obtained
were primarily of qualitative value and were not accurate
enough to permit rigid quantitative comparisons. Check
tests with the models in the initial loading condition
were made at the end of the test program, however, and
the results agreed reasonably well with the original
results. For some loadings and control configurations,
the results obtained may have been influenced by sensi-
tivity to small variations in control settings - espe-
cially at conditions for which the results varied greatly
with changes in aileron and elevator setting.

<center>PRESENTATION OF RESULTS</center>

    The detailed test results are presented in charts 1
and 2 for models A and B, respectively. The boxes on the
charts give the steady-spin and recovery characteristics
for principal combinations of aileron and elevator
settings. The keys in the lower right-hand corners of the
charts show the order of presentation of the results in
the boxes. All recoveries were attempted by full rapid
rudder reversal, and the recovery characteristics were
determined by the number of turns the model made from the
time the rudder was fully reversed until the spin rotation
ceased.

    A simplified presentation of the results, which
shows directly the effects of changes in mass distribution
on the optimum direction of aileron and elevator setting
for recovery, on the angle of attack, on the angle between
the Y-axis and the horizontal, and on the turns for
recovery from the spin at the normal spinning control
configuration (ailerons neutral, elevators up, and rudder
full with the spin), is given in figure 6 for model A
and in figure 7 for model B. In these figures, a question

mark indicates that the aileron or elevator setting had
little apparent effect on recovery. Quantitative results
are given in figures 6 and 7 only for the spin at the
normal control configuration for spinning. The quanti-
tative effects of the changes in mass distribution on
the spins obtained with other combinations of aileron
and elevator settings can be determined from charts 1
and 2.

DISCUSSION

Initial Loading Conditions

For the present tests, the initial loadings of the
models corresponded approximately to the basic loadings
of the airplanes represented by the models. These
loadings were arbitrarily selected as convenient starting
points for the test program and are fairly representative
of single-engine airplanes.

For both models in the initial loading condition
(condition 1), aileron-with spins (right aileron up and
left aileron down in a right spin) were very steep with
high angular velocities and recoveries were rapid.
Aileron-neutral and aileron-against spins were fairly
flat and recoveries from these spins were slower than
from aileron-with spins. For model B, elevator-down
settings retarded recovery whereas, for model A, elevator
setting apparently had only little effect on the general
spin characteristics. The difference in the effect of
elevator setting for the two models at almost the same
loading conditions was probably caused by the aerodynamic
differences in the models.

Variations in Mass along Body Axes

Along X-axis.- Figure 6 shows that for model A an
extreme extension of mass along the X-axis (condition 2)
had little effect on the spin characteristics. A further
large extension of the mass distributed along the X-axis
(condition 3) prevented the model from spinning except
when the ailerons were set against the spin. Retracting
the mass distributed along the X-axis (condition 4)
steepened the spin at the normal control configuration,
increased the angular velocity, prevented the model from

spinning with the elevator neutral or down, and reversed
the effect of aileron setting on recovery from that
obtained at normal loading since, in this condition,
aileron-against settings gave the most rapid recoveries.

The results obtained for model B (fig. 7) were
generally similar to those obtained for model A.

Along Y-axis.- For both models, retracting mass
along the wing accentuated the effect of aileron setting
on recovery, and extending mass along the wing reversed
the effect of aileron setting on recovery. No consistent
variation in angle of attack with the mass variations
was apparent.

Along Z-axis.- For both models, either retracting
mass along the Z-axis (condition 10) or extending mass
along the Z-axis (condition 8) retarded recovery from the
spin at the normal control configuration. The angle of
attack did not change appreciably as mass was varied
along the Z-axis. The results shown in charts 1 and 2
show that retracting mass along the Z-axis tended to make
the aileron-with spins flat and that extending mass along
the Z-axis tended to increase the angle of bank and
caused the models to spin with the inner wing inclined
up considerably. At condition 9, the change in mass
distribution from the initial value was greater for
model A than for model B (see fig. 1) and, whereas
model A would not spin for any combination of aileron
and elevator control settings, spins were obtained for
model B when the ailerons were neutral or with the spin
and the elevators were neutral or down. During these
spins the fuselage was nearly horizontal, and the inner
wing was up approximately 45°. Recoveries from these
spins varied considerably, and the model tumbled - that
is, rotated about the Y-axis - during recovery. An
explanation for the fact that model A would not spin at
condition 9 may be that the inertia pitching-moment
parameter was zero and therefore no inertia couple acted
to flatten the model and hold it in a spinning attitude.

Special Loading Conditions

Equal moments of inertia.- Tests made with all
moments of inertia equal (condition 11), so that there
would be no inertia moments acting during the spin,
resulted in conditions for both models for which steady

spins could generally not be obtained. When the elevators
were up and the ailerons were neutral or with the spin,
however, model A continued to rotate and the value of α
varied between limits of $-4°$ and $46°$ and the wing incli-
nation varied between limits of $30°$ up (inner wing) and
$18°$ down. Reversal of the rudder terminated the motion
rapidly. With the same control settings, model B
descended at a velocity too high to permit testing.

Increased moments of inertia.- In an attempt to
determine the importance of the moments of inertia as
compared with the moment-of-inertia differences, all
three moments of inertia were increased by equal incre-
ments from the initial single-engine loading conditions
so that the inertia moment parameters remained constant
at the initial values. The results obtained at this
loading (condition 13) indicated little effect of the
increases in moments of inertia upon either the steady
spin or the recoveries obtained by rudder reversal.

Typical multiengine loading.- Loading conditions
that were considered representative of the mass distri-
bution of multiengine airplanes were obtained by extending
weight along the wing and effectively retracting weight
along the fuselage (condition 12). The control effects
obtained were typical of multiengine models in that
aileron-against and elevator-down settings tended to
prevent the spin. The aileron-with spins obtained were
much flatter than the corresponding spins for the initial
loadings; however, the spins obtained with ailerons
against and at the normal spinning control configuration
were steeper.

Effect of Aerodynamic Differences in Models

The two models tested differed somewhat in aerodynamic
characteristics as measured by the tail damping-power
factor (see table I) and in other respects such as wing
location. These aerodynamic differences were large enough
to cause some differences in the test results. For model A
in the initial loading condition, for example, elevator
setting had little effect on recovery, whereas for model B
elevator-up settings expedited recovery. Model A had a
partial-length rudder so that deflecting the elevators
either up or down did not appreciably change the shielding
effect of the horizontal tail on the rudder during spins.
Model B, however, had a full-length rudder and, when the

elevators were down, more of the rudder was shielded by
the horizontal tail than when the elevators were up, with
the result that the rudder was less effective in producing
recovery. For both models the spins were somewhat steeper
with the elevators down than with the elevators up, an
indication that deflecting the elevators gave an increment
in pitching moment even though they were stalled.

With the greatest extension of mass along the X-axis
tested for model A (condition 3), the model would spin
when the ailerons were set against the spin; model B at
condition 2 (which was not so extreme a loading as
condition 3 for model A), however, would not spin for any
aileron-elevator combination even when the rudder was
full with the spin. It was thought that these results
might be attributed to the difference in the longitudinal
stability characteristics of the models. Extension of
mass along the fuselage increases the spin-flattening
moment acting during a spin and, at very large angles of
attack, the aerodynamic pro-spin moments have been found
to become very small (reference 7). For model B at
condition 2 the spin-flattening moment evidently was
large enough to cause the model to assume such a flat
attitude that spinning equilibrium was not possible. It
was also noticed that the ratio of horizontal-tail area
to wing area was considerably smaller for model B than
for model A. Brief tests were therefore made with the
stabilizer area increased for model B (aerodynamic diving
moment increased), and spins were obtained when the
ailerons were against the spin.

For the two models, variations in mass distribution
along the Y-axis had opposite effects on the attitude of
the spin at the normal control configuration for spinning.
For model A, extending mass along the Y-axis steepened
this spin and, for model B, retracting mass along the
Y-axis steepened the spin. The reason for this difference
is not apparent.

Either extending or retracting mass along the Z-axis
of model B caused the spins with the ailerons against the
spin (elevators neutral or down) to become very oscil-
latory in pitch and roll. This effect was not obtained
for model A.

It should be remembered that other models which
differed greatly in aerodynamic characteristics from the
two models tested might have given results that were

somewhat different from the present results. The indi-
cations are, however, that the effects of the mass changes
on the relative effectiveness of the controls in producing
recovery would have been the same.

Effect of Individual Inertia Moment Parameters

Certain inferences concerning the effects of the
individual inertia moment parameters can be made from the
preceding results. It appears that, as was previously
indicated and explained in reference 1, the directions
of aileron and elevator deflections for optimum recovery
vary with the value of the inertia yawing-moment param-
eter $\dfrac{k_X^2 - k_Y^2}{b^2}$. Figures 6 and 7 show that, when mass
was distributed chiefly along the wing $\left(\dfrac{k_X^2 - k_Y^2}{b^2} \text{ positive}\right)$,
elevator-down and aileron-against settings generally were
favorable to rapid recovery whereas, when mass was distri-
buted chiefly along the fuselage $\left(\dfrac{k_X^2 - k_Y^2}{b^2} \text{ negative}\right)$,
elevator-up and aileron-with settings were, in most cases,
favorable to recovery.

Varying the mass along the wing (conditions 1, 5, 6,
and 7) had little consistent effect on the attitude of
the spin at the normal control configuration - an indi-
cation that, for a constant value of the inertia pitching-
moment parameter, variations of the inertia rolling-
moment or inertia yawing-moment parameters do not affect
the spin attitude. This result agrees with conclusion 1
of reference 3. When mass was distributed chiefly along
the wing (inertia yawing-moment parameter positive),
the inertia pitching-moment parameter $\dfrac{k_Z^2 - k_X^2}{b^2}$ determined
the attitude of the spin at the normal spinning control
configuration; low values of the parameter resulted in
steep spins. A simple qualitative explanation for this
steepening of the spin is that, when mass was effectively
added along the Z-axis, the centrifugal forces acting on
the mass along the Z-axis gave a pitching moment that
nosed the model down.

When mass was distributed chiefly along the fuselage, the spin attitude did not vary consistently with any parameter until the inertia pitching-moment parameter was made so large or so small that spinning equilibrium could not be maintained.

A general comparison of all results indicates that the inertia pitching-moment parameter also influenced the angular velocities of the spins; low values of the parameter generally gave high angular velocities.

When mass was distributed chiefly along the fuselage (inertia yawing-moment parameter negative), the adverse effect on recovery of setting the elevators down was emphasized as the inertia rolling-moment parameter $\dfrac{k_Y^2 - k_Z^2}{b^2}$ approached zero.

CONCLUSIONS

An investigation was conducted to determine the effect of extreme changes in mass distribution along each of the three body axes for two models of single-engine airplanes having different geometric arrangements and aerodynamic characteristics. The test results were analyzed to investigate the effects of the individual inertia moment parameters upon spin and recovery characteristics. It was recognized that the extent to which the spin would be affected by mass changes would depend upon the aerodynamic characteristics of the design. The test results indicated the following qualitative conclusions:

1. The value of the inertia yawing-moment parameter mainly determined the effect of aileron setting on recovery, and the values of both the inertia yawing-moment and the inertia rolling-moment parameters influenced the effect of elevator setting on recovery.

2. When mass was distributed chiefly along the wing (inertia yawing-moment parameter positive), the inertia pitching-moment parameter determined the attitude of the spin at the normal spinning control configuration.

3. The value of the inertia pitching-moment parameter
determined the angular velocities of the spins.

4. The moment-of-inertia differences were apparently
of primary importance in determining the spin and recovery
characteristics of a given design. The magnitudes of the
individual moments of inertia appeared to be of secondary
importance.

5. Steady spins generally could not be maintained
when all three moments of inertia were equal.

Langley Memorial Aeronautical Laboratory
    National Advisory Committee for Aeronautics
        Langley Field, Va.

REFERENCES

1. Neihouse, A. I.: A Mass-Distribution Criterion for
     Predicting the Effect of Control Manipulation on
     the Recovery from a Spin. NACA ARR, Aug. 1942.

2. Seidman, Oscar, and Kamm, Robert W.: Multiengine
     Airplane Spin Characteristics as Indicated by
     Model Tests in the Free-Spinning Wind Tunnel.
     NACA ARR, July 1942.

3. Kamm, Robert W.: The Effect of Spanwise Mass Distri-
     bution upon the Spin Characteristics of Airplanes
     as Determined by Model Tests Conducted in the Free-
     Spinning Wind Tunnel. NACA ARR, Aug. 1942.

4. Scudder, Nathan F.: A Study of Factors Affecting
     the Steady Spin of an Airplane. NACA TN No. 468,
     1933.

5. Gates, S. B., and Francis, R. H.: An Analytical
     Survey of the Effect of Mass Distribution on
     Spinning Equilibrium. R. & M. No. 1644, British
     A.R.C., 1934.

6. Zimmerman, C. H.: Preliminary Tests in the N.A.C.A.
     Free-Spinning Wind Tunnel. NACA Rep. No. 557, 1936.

7. Knight, Montgomery, and Wenzinger, Carl J.: Rolling
     Moments Due to Rolling and Yaw for Four Wing Models
     in Rotation. NACA Rep. No. 379, 1931.

8. Seidman, Oscar, and Donlan, Charles J.: An Approxi-
     mate Spin Design Criterion for Monoplanes.
     NACA TN No. 711, 1939.

TABLE I

DIMENSIONS OF AIRPLANES REPRESENTED BY MODELS

	Model A	Model B
Wing span, ft	39	35
Over-all length, ft . . . . :	27.8	29.8
Normal weight, lb	6450	6340
Normal c.g. location, percent M.A.C.	29.1	31.5
Wing:		
Area, sq ft	259	232
Section		
Root	NACA CYH, 18 percent thick	NACA 0015
Tip	NACA CYH, 11.8 percent thick	NACA 23009 modified
Root (reference) chord, in.	98.7	100.0
Root-chord incidence, deg	0	2
Tip-chord incidence, deg	0	2
Aspect ratio	5.9	5.3
Sweepback of L.E. of wing, deg	1.6 (approx.)	3.6
Dihedral at 30 percent chord line, deg . . . Outer panel { Top, 3; Bottom, $5\frac{1}{2}$		3
M.A.C., in.	83.3	84.3
L.E. of M.A.C. rearward of L.E. of root chord, in.	3.1	5.6
Ailerons:		
Chord, percent root chord	16.4	11.3
Area behind hinge line, sq ft . . .	19.4	12.3
Span, percent b/2	36.8	40.5
Horizontal tail surfaces:		
Total area, sq ft	61.1	30.5
Span, ft	14.8	10.9
Elevator area behind hinge line, sq ft	28.1	12.0
Distance from c.g. to elevator hinge line, ft	16.8	16.2

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE I - Concluded

DIMENSIONS OF AIRPLANES REPRESENTED BY MODELS - Concluded

	Model A	Model B
Vertical tail surfaces:		
Total area, sq ft	25.8	14.4
Rudder area behind hinge line, sq ft	13.5	8.0
Distance from c.g. to rudder hinge line, ft	16.7	16.5
Maximum control settings:		
Rudder, deg	30 right, 30 left	30 right, 30 left
Elevators, deg	30 up, 20 down	35 up, 15 down
Ailerons, deg	30 up, 15 down	25 up, 10 down
Tail damping-power factor (calculated according to method of reference 8)	0.0000727	0.000175

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE II.- FULL-SCALE MASS DISTRIBUTION OF MODEL A FOR VARIOUS LOADING CONDITIONS TESTED

$\left[\text{Wing loading, 25 lb/sq ft; equivalent test altitude, 6000 ft; relative density } \frac{m}{\rho Sb} \text{ at test altitude, 10.0}\right]$

Condition	Actual change from initial loading	Effective change from initial loading	I_X (slug-ft²)	I_Y (slug-ft²)	I_Z (slug-ft²)	$\frac{k_X}{b/2}$	$\frac{k_Y}{b/2}$	$\frac{k_Z}{b/2}$	$\frac{k_X^2 - k_Y^2}{b^2}$	$\frac{k_Y^2 - k_Z^2}{b^2}$	$\frac{k_Z^2 - k_X^2}{b^2}$
[a]1	------------	------------	4,000	6,680	9,960	0.229	0.297	0.362	-88×10^{-4}	-108×10^{-4}	196×10^{-4}
2	Mass extended along X-axis	(b)	4,000	12,520	15,800	.229	.405	.456	-280	-108	388
3	-------do------	(b)	4,000	16,300	19,580	.229	.463	.507	-404	-108	512
4	Mass extended along Y- and Z-axes	Mass retracted along X-axis	13,480	11,590	14,870	.421	.390	.442	62	-108	46
5	Mass extended along X- and Z-axes	Mass retracted along Y-axis	7,270	13,230	13,230	.309	.418	.418	-196	0	196
6	Mass extended along Y-axis	(b)	8,960	6,680	14,920	.343	.297	.443	75	-270	196
7	-------do------	(b)	12,140	6,680	18,100	.399	.297	.488	180	-375	196
8	Mass extended along Z-axis	(b)	7,280	9,960	9,960	.309	.362	.362	-88	0	88
9	-------do------	(b)	9,960	12,640	9,960	.362	.408	.362	-88	88	0
10	Mass extended along X- and Y-axes	Mass retracted along Z-axis	6,965	9,645	15,900	.302	.356	.457	-88	-205	293
[c]11	Mass extended along Y- and Z-axes	(b)	12,640	12,640	12,640	.408	.408	.408	0	0	0
[d]12	Mass extended along Y- and Z-axes	Mass extended along Y-axis and retracted along X-axis	11,380	9,420	14,600	.387	.352	.438	64	-170	106
13	Mass extended along X-, Y-, and Z-axes	None	7,150	9,830	13,110	.307	.359	.415	-88	-108	196

[a]Initial loading condition (typical single-engine loading).
[b]Effective change same as actual change listed in preceding column.
[c]Equal moments of inertia.
[d]Typical multiengine loading.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE III.- FULL-SCALE MASS DISTRIBUTION OF MODEL B FOR VARIOUS LOADING CONDITIONS TESTED

[Wing loading, 27.3 lb/sq ft; equivalent test altitude, 8000 ft; relative density $\frac{m}{\rho S b}$ at test altitude, 13.0]

Condition	Actual change from initial loading	Effective change from initial loading	I_X (slug-ft²)	I_Y (slug-ft²)	I_Z (slug-ft²)	$\frac{k_X}{b/2}$	$\frac{k_Y}{b/2}$	$\frac{k_Z}{b/2}$	$\frac{k_X^2 - k_Y^2}{b^2}$	$\frac{k_Y^2 - k_Z^2}{b^2}$	$\frac{k_Z^2 - k_X^2}{b^2}$
[a]1	--------------	--------------	3,050	5,250	7,850	0.225	0.295	0.360	-91×10^{-4}	-108×10^{-4}	199×10^{-4}
2	Mass extended along X-axis	(b)	3,050	10,500	13,100	.225	.418	.466	-309	-108	417
3	--------------	--------------	----------	----------	----------	-----	-----	-----	----------	-----------	----------
4	Mass extended along Y- and Z-axes	Mass retracted along X-axis	12,650	10,980	13,580	.459	.426	.475	69	-108	39
5	Mass extended along X- and Z-axes	Mass retracted along Y-axis	5,650	10,450	10,450	.306	.416	.416	-199	0	199
6	Mass extended along Y-axis	(b)	6,940	5,250	11,740	.340	.295	.441	70	-269	199
7	------do------	(b)	9,520	5,250	14,320	.397	.295	.487	176	-375	199
8	Mass extended along Z-axis	(b)	5,650	7,850	7,850	.306	.360	.360	-91	0	91
9	------do------	(b)	6,750	8,950	7,850	.334	.385	.360	-91	46	45
10	Mass extended along X- and Y-axes	Mass retracted along Z-axis	4,520	6,720	10,790	.274	.335	.424	-91	-169	260
[c]11	Mass extended along Y- and Z-axes and retracted along X-axis	(b)	7,850	7,850	7,850	.360	.360	.360	0	0	0
[d]12	Mass extended along Y- and Z-axes and retracted along X-axis	Mass extended along Y-axis and retracted along X-axis	6,750	5,250	9,360	.334	.295	.394	62	-170	108
13	Mass extended along X-, Y-, and Z-axes	None	5,990	8,190	10,790	.314	.368	.424	-91	-108	199

[a]Initial loading condition (typical single-engine loading).
[b]Effective change same as actual change listed in preceding column.
[c]Equal moments of inertia.
[d]Typical multiengine loading.

CHART 1 – SPIN CHARACTERISTICS OF MODEL A

[Effect of mass variations along the X-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins; right erect spins]

Condition 4
Mass retracted along X-axis

$$\frac{k_X^2-k_Y^2}{b^2} = 62 \times 10^{-4}$$

$$\frac{k_Y^2-k_Z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_Z^2-k_X^2}{b^2} = 46 \times 10^{-4}$$

24	2U
196	5.1
	>3½

22	5U
215	3.8
¾	·1

24	9U
215	2.7
½	·½

Elevators up

Ailerons with — No (c)

Ailerons against — No (c)

Elevators down — No (c)

No (c)

No (c)

Condition 1
Initial loading

$$\frac{k_X^2-k_Y^2}{b^2} = -88 \times 10^{-4}$$

$$\frac{k_Y^2-k_Z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_Z^2-k_X^2}{b^2} = 196 \times 10^{-4}$$

a,b

| ¾ | ·1 |

60	1D
137	2.7
2¾	·3

60	4U
128	2.8
3¼	·3¼

Elevators up

16	4D
270	5.1
¾	

49	2U
140	3.0
2¾	·2¾

Ailerons with

57	5U
125	3.1
3½	·3

Ailerons against

19	3D
208	5.3
1¼	·1

48	3U
134	3.1
2½	·2½

Elevators down

56	4U
125	3.3
3¼	·3½

Condition 2
Mass extended along X-axis →

$$\frac{k_X^2-k_Y^2}{b^2} = -280 \times 10^{-4}$$

$$\frac{k_Y^2-k_Z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_Z^2-k_X^2}{b^2} = 388 \times 10^{-4}$$

No (c)

62	2D
137	2.1
3¼	·3¼

68	1U
128	2.5
∞	

Elevators up

No (c)

48	1D
146	2.2
1¾	·1½

Ailerons with

68	2U
123	2.6
10,11	

Ailerons against

No (c)

55	1D
131	2.4
2¾	·3

Elevators down

66	2U
120	2.8
18,21	

Condition 3

$$\frac{k_X^2-k_Y^2}{b^2} = -404 \times 10^{-4}$$

$$\frac{k_Y^2-k_Z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_Z^2-k_X^2}{b^2} = 512 \times 10^{-4}$$

No (c)

No (c)

71	9U
125	2.2
∞	

Elevators up

No (c)

Ailerons with

No (c)

Ailerons against

No (c)

Elevators down

71	2U
113	2.3
∞	

---

a Wandering spin.
b Oscillatory spin.
c No means model would not spin.

Also spins jerkily. Fuselage appears to yaw to right about Z-axis in an attempt to become horizontal. As fuselage reaches horizontal, right wing and nose drop. The cycle then repeats.

Model values converted to corresponding full-scale values. U denotes inner wing up, D, inner wing down	α (deg)	ø (deg)
	V (fps)	Ω (rad/sec)
	Turns for recovery	

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Chart 1

Chart 1
(Cont.)

NACA ARR No. L5C09

CHART 1. – SPIN CHARACTERISTICS OF MODEL A – Continued

[Effect of mass variations along the Y-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins; right erect spins]

Condition 5
Mass retracted along Y-axis

$$\frac{k_X^2 - k_Y^2}{b^2} = -196 \times 10^{-4}$$
$$\frac{k_Y^2 - k_Z^2}{b^2} = 0$$
$$\frac{k_Z^2 - k_X^2}{b^2} = 196 \times 10^{-4}$$

Condition 1
Initial loading

$$\frac{k_X^2 - k_Y^2}{b^2} = -88 \times 10^{-4}$$
$$\frac{k_Y^2 - k_Z^2}{b^2} = -108 \times 10^{-4}$$
$$\frac{k_Z^2 - k_X^2}{b^2} = 196 \times 10^{-4}$$

Condition 6
Mass extended along Y-axis

$$\frac{k_X^2 - k_Y^2}{b^2} = 75 \times 10^{-4}$$
$$\frac{k_Y^2 - k_Z^2}{b^2} = -270 \times 10^{-4}$$
$$\frac{k_Z^2 - k_X^2}{b^2} = 196 \times 10^{-4}$$

Condition 7

$$\frac{k_X^2 - k_Y^2}{b^2} = 180 \times 10^{-4}$$
$$\frac{k_Y^2 - k_Z^2}{b^2} = -375 \times 10^{-4}$$
$$\frac{k_Z^2 - k_X^2}{b^2} = 196 \times 10^{-4}$$

a Wandering spin.
b Oscillatory spin.
c α and ϕ vary between values indicated.
d No means model would not spin.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Model values converted to corresponding full-scale values. U denotes inner wing up; D, inner wing down.	α (deg)	ϕ (deg)
	V (fps)	Ω (rad/sec)
	Turns for recovery	

CHART 1. – SPIN CHARACTERISTICS OF MODEL A – Continued

[Effect of mass variations along the Z-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins ; right erect spins]

Condition 10
Mass retracted along Z-axis

$$\frac{K_X^2 - K_Y^2}{b^2} = -88 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = -205 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 293 \times 10^{-4}$$

Condition 1
Initial loading

$$\frac{K_X^2 - K_Y^2}{b^2} = -88 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = -108 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 196 \times 10^{-4}$$

Condition 8
Mass extended along Z-axis

$$\frac{K_X^2 - K_Y^2}{b^2} = -88 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = 0$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 88 \times 10^{-4}$$

Condition 9

$$\frac{K_X^2 - K_Y^2}{b^2} = -88 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = 88 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 0$$

a Wandering spin.
b Oscillatory spin.
c No means model would not spin.

Model values converted to corresponding full-scale values. U denotes inner wing up; D, inner wing down.	α (deg)	ϕ (deg)
	V (fps)	$\frac{rad}{sec}$
	Turns for recovery	

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Chart 1 (Cont.)

Chart 1
(Conc.)

CHART 1.- SPIN CHARACTERISTICS OF MODEL A - Concluded

[Effect of special loading conditions; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spin; right erect spins]

Condition 1
Initial loading

$$\frac{K_x^2 - K_y^2}{b^2} = -88 \times 10^{-4}$$

$$\frac{K_y^2 - K_z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{K_z^2 - K_x^2}{b^2} = 196 \times 10^{-4}$$

a,b

¾, 1

| 60 | 1D |
| 137 | 2.7 |
| 2¾, 3 |

| 60 | 4U |
| 128 | 2.8 |
| 3¼, 3¼ |

Elevators up

Ailerons with

| 16 | 4D |
| 270 | 5.1 |
| ¾ |

| 49 | 2U |
| 140 | 3.0 |
| 2¾, 2¾ |

Ailerons against

| 57 | 5U |
| 125 | 3.1 |
| 3, 3½ |

Elevators down

| 19 | 3D |
| 208 | 5.3 |
| 1, 1¼ |

| 48 | 3U |
| 134 | 3.1 |
| 2½, 2½ |

| 56 | 4U |
| 125 | 3.3 |
| 3¼, 3½ |

Condition 11
Equal moments of inertia

$$\frac{K_x^2 - K_y^2}{b^2} = 0$$

$$\frac{K_y^2 - K_z^2}{b^2} = 0$$

$$\frac{K_z^2 - K_x^2}{b^2} = 0$$

d

| -1 | 44 | 30U | 9D |
| 233 | 1.9 |
| ½ |

c

No

c

No

Elevators up

Ailerons against

c

No

Elevators down

c

No

c

No

Condition 12
Typical multiengine loading

$$\frac{K_x^2 - K_y^2}{b^2} = 64 \times 10^{-4}$$

$$\frac{K_y^2 - K_z^2}{b^2} = -170 \times 10^{-4}$$

$$\frac{K_z^2 - K_x^2}{b^2} = 106 \times 10^{-4}$$

| 47 | 2D |
| 149 | 3.4 |
| ∞ |

| 38 | 2U |
| 155 | 3.3 |
| 2½, 3 |

| 32 | 5U |
| 173 | 3.3 |
| 1¼, 1¾ |

Elevators up

Ailerons with

| 38 | 0 |
| 143 | 4.2 |
| 3¾, 6 |

c

No

Ailerons against

c

No

Elevators down

c

No

c

No

Condition 13
Increased moments of inertia

$$\frac{K_x^2 - K_y^2}{b^2} = -88 \times 10^{-4}$$

$$\frac{K_y^2 - K_z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{K_z^2 - K_x^2}{b^2} = 196 \times 10^{-4}$$

a,b

| 56 | 1U |
| 134 | 2.6 |
| 2¾, 3 |

| 62 | 4U |
| 125 | 2.8 |
| 4¼, 4¼ |

Elevators up

Ailerons with

| 39 | 8D |
| 161 | 3.2 |
| 2¼, 2¼ |

| 45 | 3U |
| 143 | 3.1 |
| 2¼, 2½ |

| 52 | 6U |
| 131 | 3.0 |
| 2½, 2¾ |

Ailerons against

Elevators down

| 19 | 3D |
| 208 | 5.3 |
| ¾, ¾ |

| 45 | 3U |
| 137 | 3.2 |
| 2¾, 2¾ |

| 55 | 5U |
| 128 | 3.1 |
| 3½, 3½ |

d
| -4 | 46 | 25U | 8D |
| 227 |
| ½ Visual |

c

No

c

No

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

a Wandering spin.
b Oscillatory spin.
c No means model would not spin.
d α and Ø vary between values indicated.

Model values converted to corresponding full-scale values. U denotes inner wing up; D, inner wing down.		α (deg)	Ø (deg)
		V (fps)	Ω (rad/sec)
		Turns for recovery	

CHART 2.- SPIN CHARACTERISTICS OF MODEL B

[Effect of mass variations along the X-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins; right erect spins]

d Condition 4 Mass retracted along X-axis	Condition 1 Initial loading	d Condition 2 Mass extended along X-axis

$$\frac{k_X^2-k_Y^2}{b^2} = 69\times10^{-4}$$
$$\frac{k_Y^2-k_Z^2}{b^2} = -108\times10^{-4}$$
$$\frac{k_Z^2-k_X^2}{b^2} = 39\times10^{-4}$$

$$\frac{k_X^2-k_Y^2}{b^2} = -91\times10^{-4}$$
$$\frac{k_Y^2-k_Z^2}{b^2} = -108\times10^{-4}$$
$$\frac{k_Z^2-k_X^2}{b^2} = 199\times10^{-4}$$

$$\frac{k_X^2-k_Y^2}{b^2} = -309\times10^{-4}$$
$$\frac{k_Y^2-k_Z^2}{b^2} = -108\times10^{-4}$$
$$\frac{k_Z^2-k_X^2}{b^2} = 417\times10^{-4}$$

Condition 4 (Mass retracted along X-axis):

- e
- No
- 30 | 0 ; 255 | 4.7 ; ∞ (Elevators up)
- No (Ailerons with)
- e ; No
- e ; No (Ailerons against, Elevators down)
- No
- e ; No
- e ; No

Condition 1 (Initial loading):

- 53 | 2D ; 169 | 2.5 ; 1½, 2¼ (Elevators up)
- 59 | 3U ; 163 | 2.5 ; 1¾, 2¼
- a,b
- ½, ¾
- b,c
- a ; 49 | 2D ; 173 | 2.7 ; 2, 2¼ (Ailerons with) 1½
- 55 | 3U ; 161 | 2.8 ; 3½, 3½ (Ailerons against)
- b,c
- a ; 47 | 2D ; 165 | 2.8 ; 3½, 4 (Elevators down) 1¾
- 54 | 3U ; 159 | 2.8 ; 5½, 6

Condition 2 (Mass extended along X-axis):

- e ; No
- e ; No (Elevators up)
- No (Ailerons with)
- e ; No
- e ; No (Ailerons against)
- e ; No (Elevators down)
- e ; No

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

a Wandering spin.
b Recovery was attempted before model reached final attitude.
c Steep spin.
d Condition 3 was not tested for model B.
e No means model would not spin.

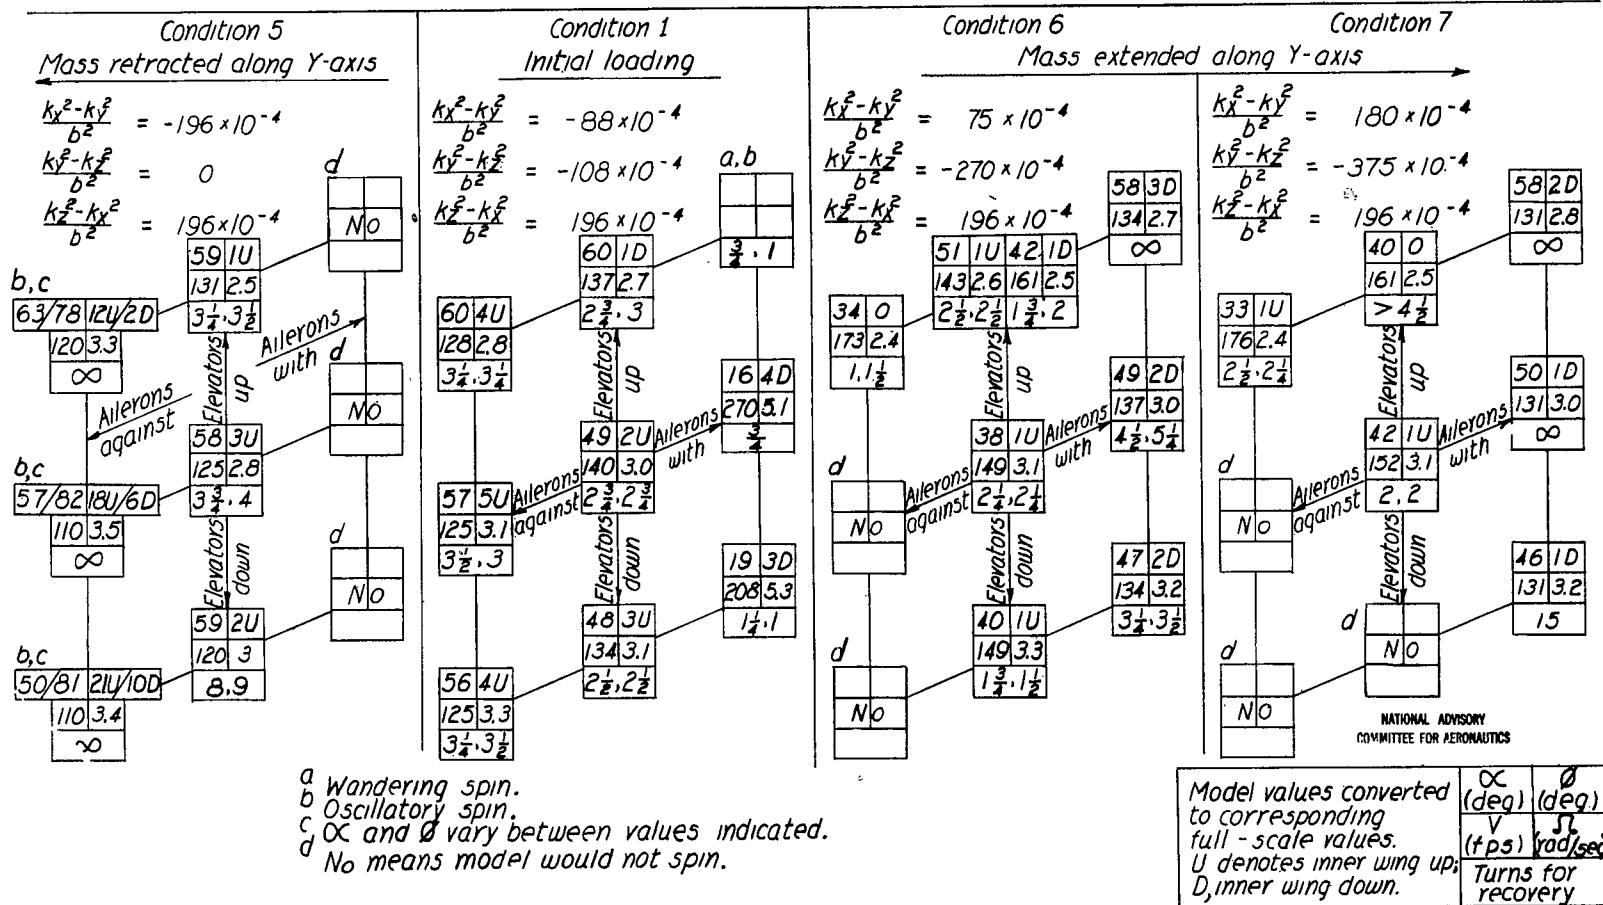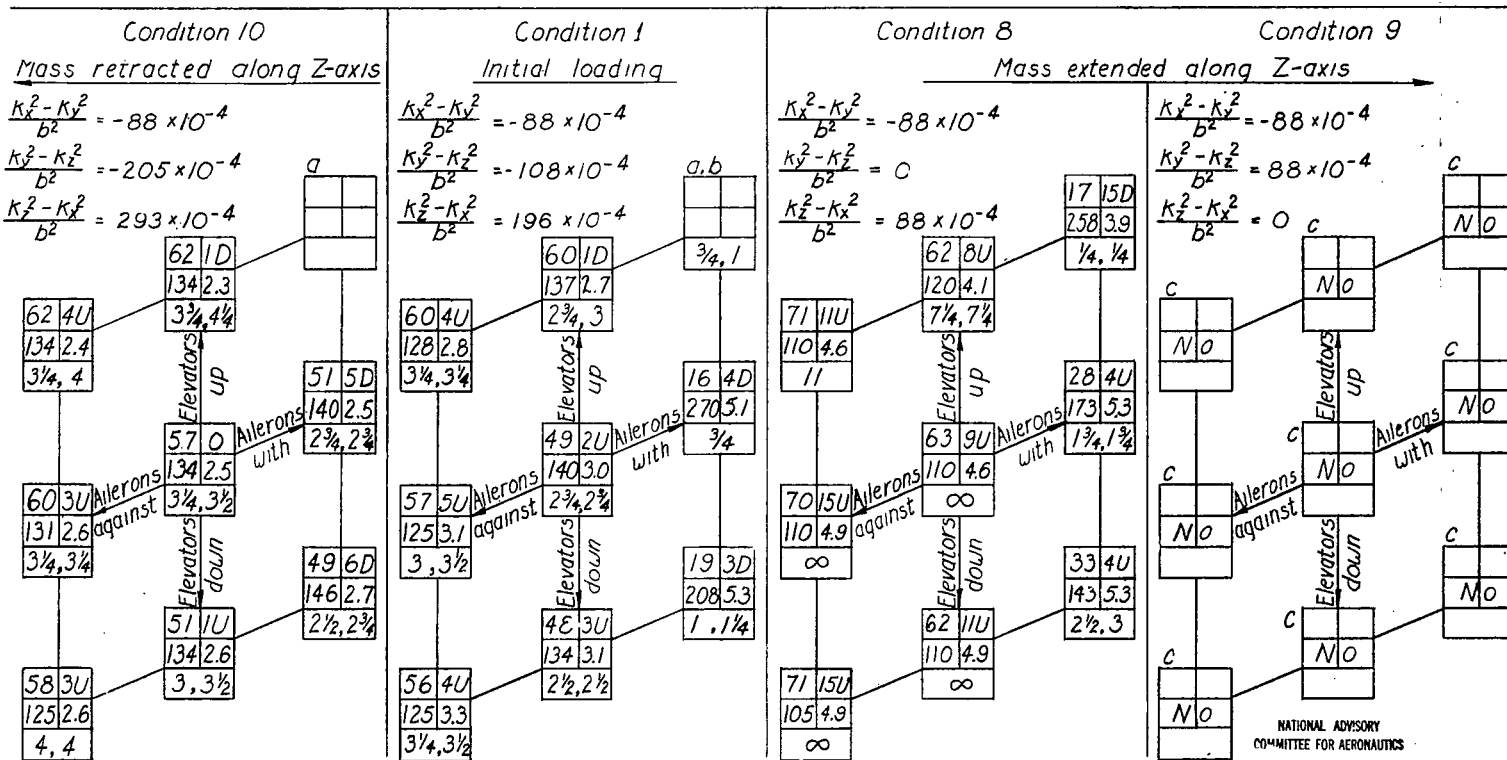| Model values converted to corresponding full-scale values.	α (deg)	Ø (deg)
	V (fps)	Ω (rad/sec)
U denotes inner wing up. D, inner wing down.	Turns for recovery	

Chart 2

Chart 2
(Cont.)

NACA ARR No. L5C09

CHART 2.– SPIN CHARACTERISTICS OF MODEL B – Continued

[Effect of mass variations along the Y-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins; right erect spins]
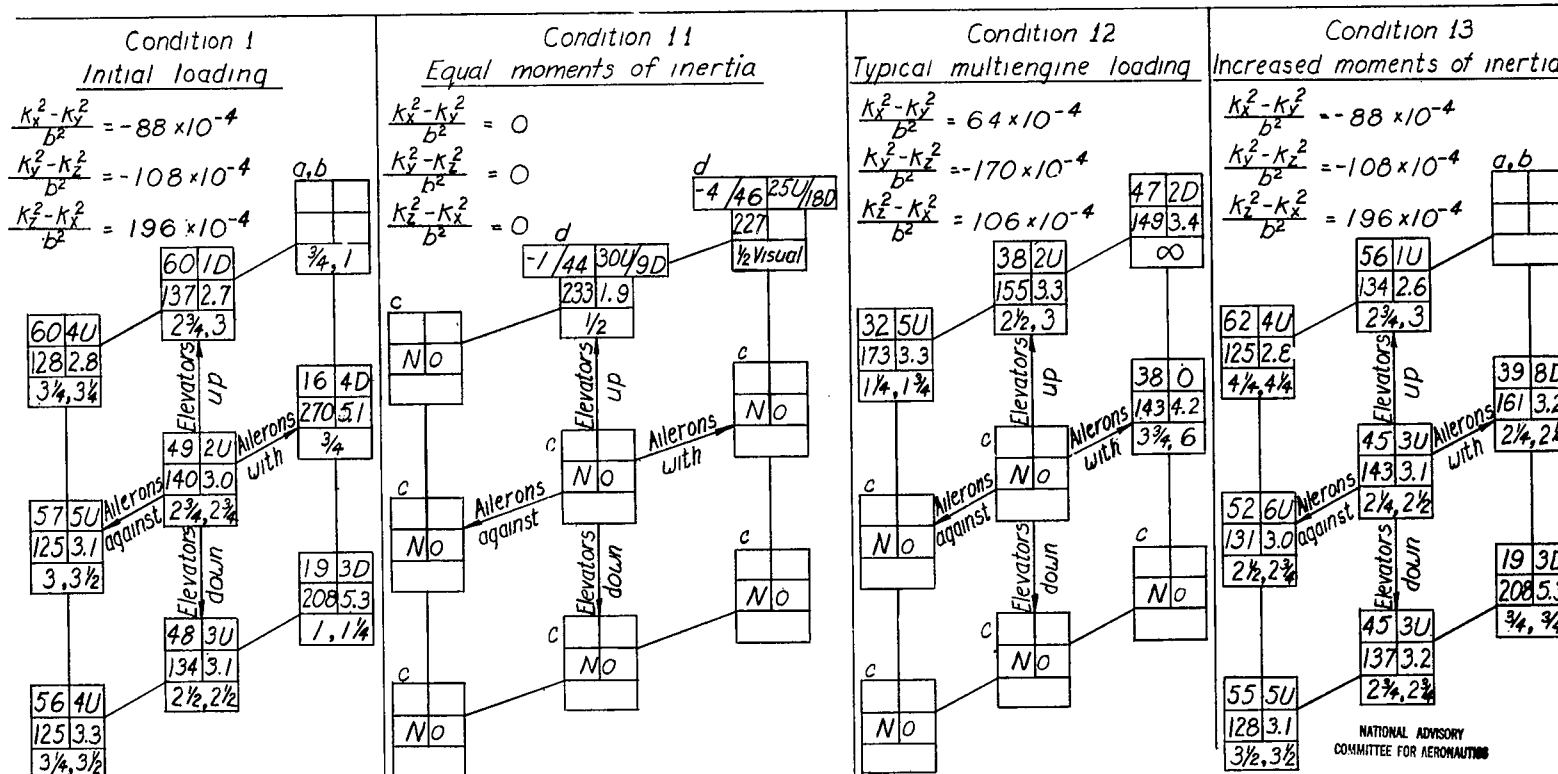
Condition 5
Mass retracted along Y-axis

$$\frac{k_X^2 - k_Y^2}{b^2} = -199 \times 10^{-4}$$

$$\frac{k_Y^2 - k_Z^2}{b^2} = 0$$

$$\frac{k_Z^2 - k_X^2}{b^2} = 199 \times 10^{-4}$$

a	35	3D
	226	2.1
	1½, 2¼	

d,e
38/86	31U/25D
170	2.4
2, 2½	

37	1D
185	2.7
3, 3¼	

d,e
28/90	35D/39D
161	2.8
∞	

Ailerons with

Ailerons against

44	0
179	2.7
∞	

d,e
34/86	36U/23D
157	2.8
∞	

Elevators up
Elevators down

a, c, c

Condition 1
Initial loading

$$\frac{k_X^2 - k_Y^2}{b^2} = -91 \times 10^{-4}$$

$$\frac{k_Y^2 - k_Z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_Z^2 - k_X^2}{b^2} = 199 \times 10^{-4}$$

a,b
| | ½, ¾ |

53	2D
169	2.5
1½, 2¼	

59	3U
163	2.5
1¾, 2¼	

b,c
| | 1½ |

a
49	2D
173	2.7
2, 2¼	

55	3U
161	2.8
3½, 3½	

b,c

a
47	2D
165	2.8
3½, 4	

| | 1¾ |

54	3U
159	2.8
5½, 6	

Ailerons with
Ailerons against
Elevators up
Elevators down

Condition 6
Mass extended along Y-axis

$$\frac{k_X^2 - k_Y^2}{b^2} = 70 \times 10^{-4}$$

$$\frac{k_Y^2 - k_Z^2}{b^2} = -269 \times 10^{-4}$$

$$\frac{k_Z^2 - k_X^2}{b^2} = 199 \times 10^{-4}$$

50	2D
176	2.3
>3	

52	2D
176	2.3
3, 3½	

a
30	2U
252	2.4
½, ½	

45	4D
182	2.7
>7	

42	6U
188	2.7
2, 2	

Ailerons with
Ailerons against

41	4D
188	2.9
4, 4½	

g
51/34	6D/15U
163/220	2.9/3.1
1½, 2½	

f
| N | o |

Elevators up
Elevators down

Condition 7
Mass extended along Y-axis

$$\frac{k_X^2 - k_Y^2}{b^2} = 176 \times 10^{-4}$$

$$\frac{k_Y^2 - k_Z^2}{b^2} = -375 \times 10^{-4}$$

$$\frac{k_Z^2 - k_X^2}{b^2} = 199 \times 10^{-4}$$

54	2D
170	2.3
>7	

51	0
174	2.3
>3½	

29	1U
252	2.3
½, ¾	

51	1D
170	2.7
>10	

33	2U
185	2.8
2	

f
| N | o |

48	1D
170	2.7
5, 6	

f

f
| N | o |

Ailerons with
Ailerons against
Elevators up
Elevators down

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Footnotes

a Wandering spin.
b Recovery was attempted before model reached final attitude.
c Steep spin.
d Oscillatory spin.
e α and ∅ vary between values indicated.
f No means model would not spin.
g Velocities and angles vary between values indicated.

	α (deg)	∅ (deg)
Model values converted to corresponding full-scale values.	V (fps)	Ω (rad/sec)
U denotes inner wing up; D, inner wing down.	Turns for recovery	

CHART 2.— SPIN CHARACTERISTICS OF MODEL B — Continued

[Effect of mass variations along the Z-axis; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spins; right erect spins]
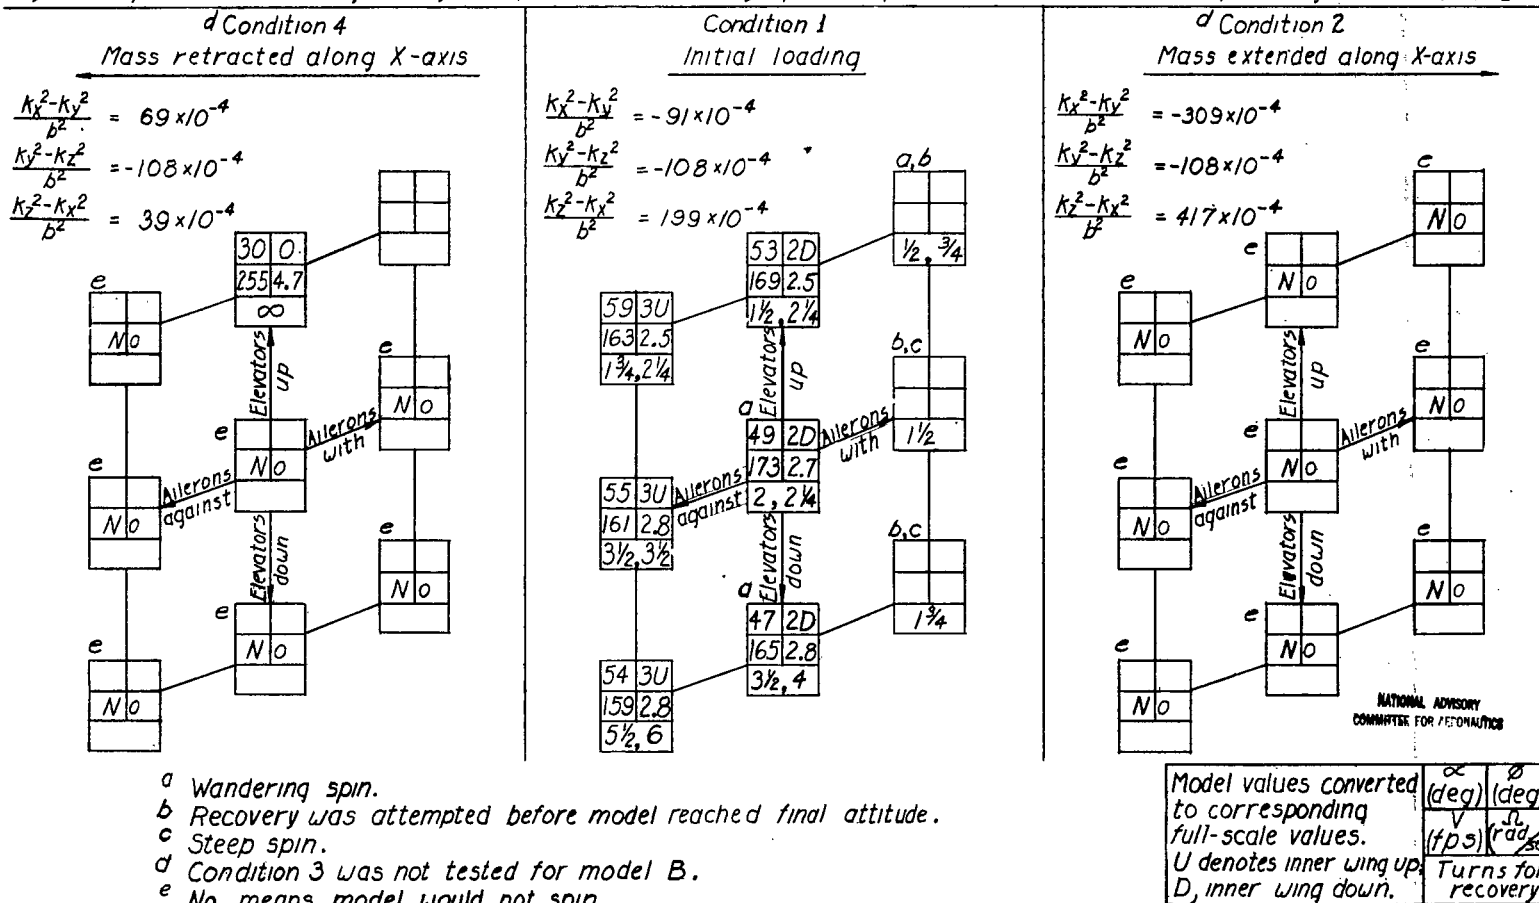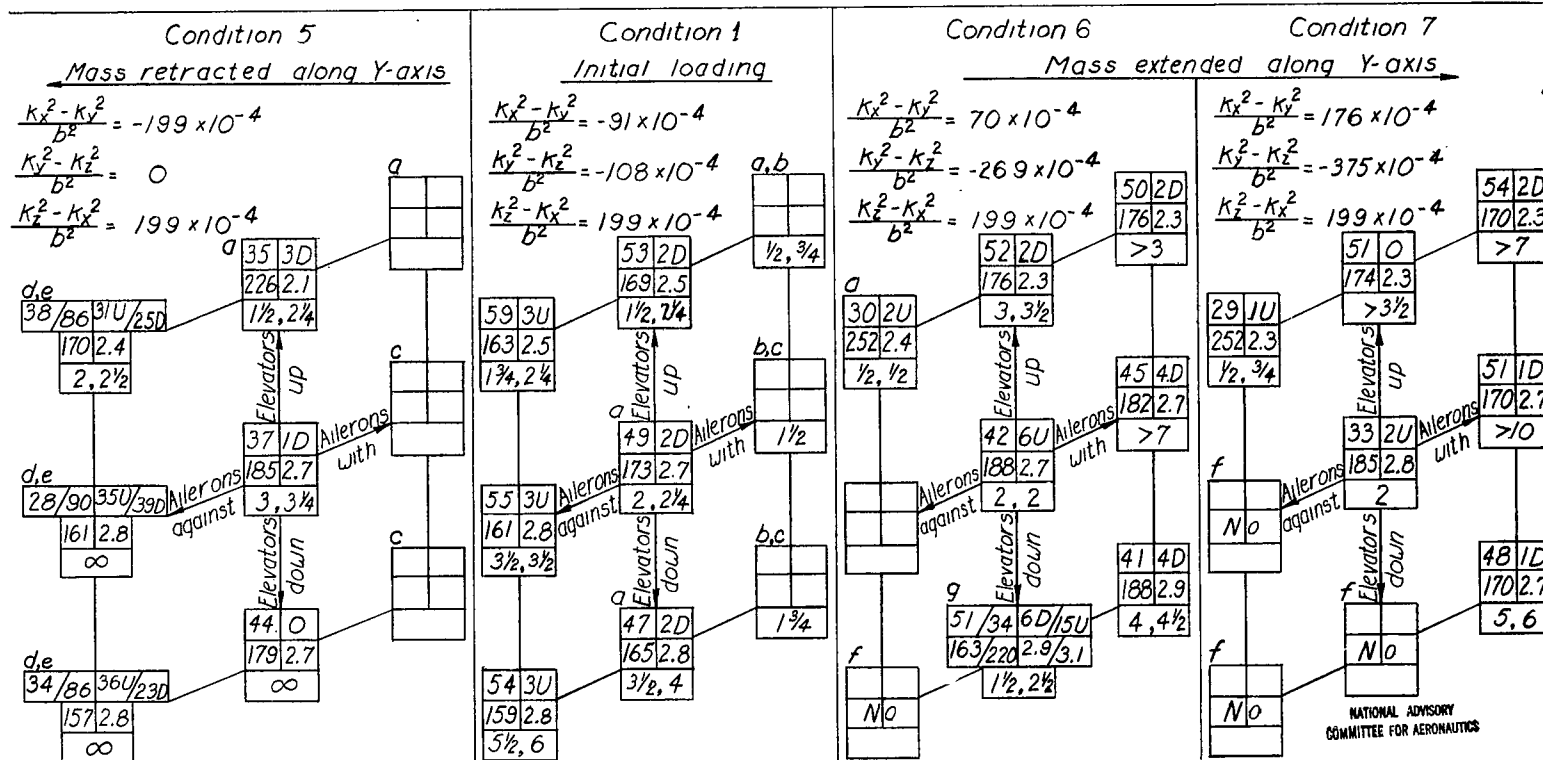
Condition 10
Mass retracted along Z-axis

$$\frac{k_X^2 - k_y^2}{b^2} = -91 \times 10^{-4}$$

$$\frac{k_y^2 - k_z^2}{b^2} = -169 \times 10^{-4}$$

$$\frac{k_z^2 - k_x^2}{b^2} = 260 \times 10^{-4}$$

g
55	6D
165	2.0
>1½	

g
61	2D
161	2.1
>3	

g
63	0
150	2.4
>4	

52	4D
177	2.3

g
60	1D
153	2.4
>3	

d,e,g
57/75	18U/10D
153	2.4
>7	

58	4D
169	2.3

g
| 62 | 2D |
| 153 | 2.4 |

d,e
49/76	20U/14D
153	2.5
>6	
>4½	

Elevators up / Elevators down / Ailerons with / Ailerons against

Condition 1
Initial loading

$$\frac{k_X^2 - k_y^2}{b^2} = -91 \times 10^{-4}$$

$$\frac{k_y^2 - k_z^2}{b^2} = -108 \times 10^{-4}$$

$$\frac{k_z^2 - k_x^2}{b^2} = 199 \times 10^{-4}$$

a,b
53	2D
169	2.5
1½, 2¼	

| ½, ¾ | |

59	3U
163	2.5
1¾, 2¼	

b,c
49	2D
173	2.7
2, 2¼	

| 1½ | |

a
55	3U
161	2.8
3½, 3½	

b,c
47	2D
165	2.8
3½, 4	

| 1¾ | |

a
54	3U
159	2.8
5½, 6	

Elevators up / Elevators down / Ailerons with / Ailerons against

Condition 8
Mass extended along Z-axis

$$\frac{k_X^2 - k_y^2}{b^2} = -91 \times 10^{-4}$$

$$\frac{k_y^2 - k_z^2}{b^2} = 0$$

$$\frac{k_z^2 - k_x^2}{b^2} = 91 \times 10^{-4}$$

f
| No | |

52	1U
173	3.3
>3¾	

64	5U
150	3.4
∞	

20	2D
254	5.8
¼	

53	2U
163	3.8
>9	

d,e
33/78	34U/12D
153	3.8
∞	

25	1U
234	5.9
2½, 2½	

51	2U
153	3.8
∞	

d,e
35/75	30U/8D
146	3.9
∞	

Elevators up / Elevators down / Ailerons with / Ailerons against

Condition 9

$$\frac{k_X^2 - k_y^2}{b^2} = -91 \times 10^{-4}$$

$$\frac{k_y^2 - k_z^2}{b^2} = 46 \times 10^{-4}$$

$$\frac{k_z^2 - k_x^2}{b^2} = 45 \times 10^{-4}$$

f,h
| No | |

f,h
| No | |

f,h
| No | |

75	37U
169	5.9
½, ½	

83	44U
161	4.7
3½, 9	

f,h
| No | |

80	41U
161	5.9
>13	

82	44U
189	5.6
1, 3	

f,h
| No | |

Elevators up / Elevators down / Ailerons with / Ailerons against

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Footnotes:
a Wandering spin.
b Recovery was attempted before model reached final attitude.
c Steep spin.
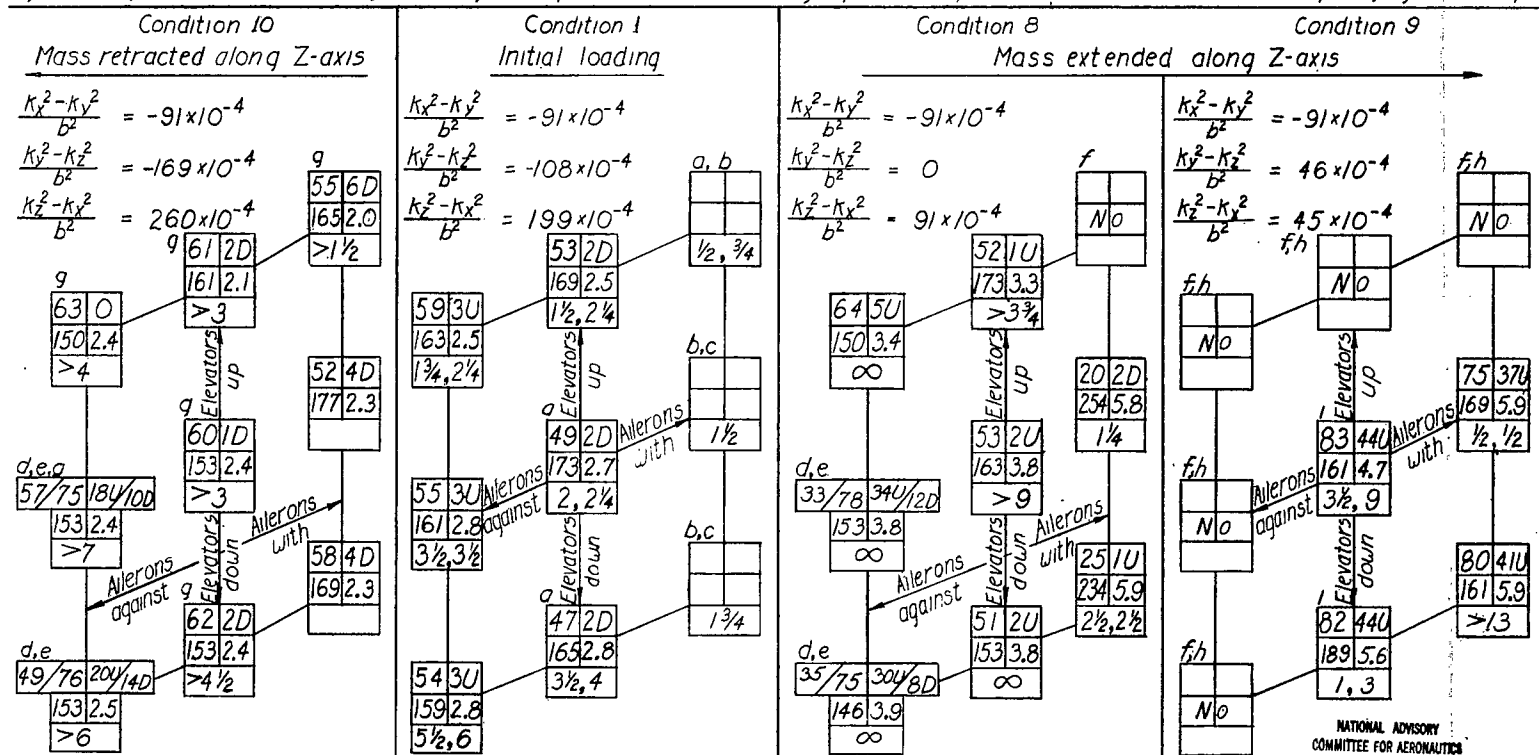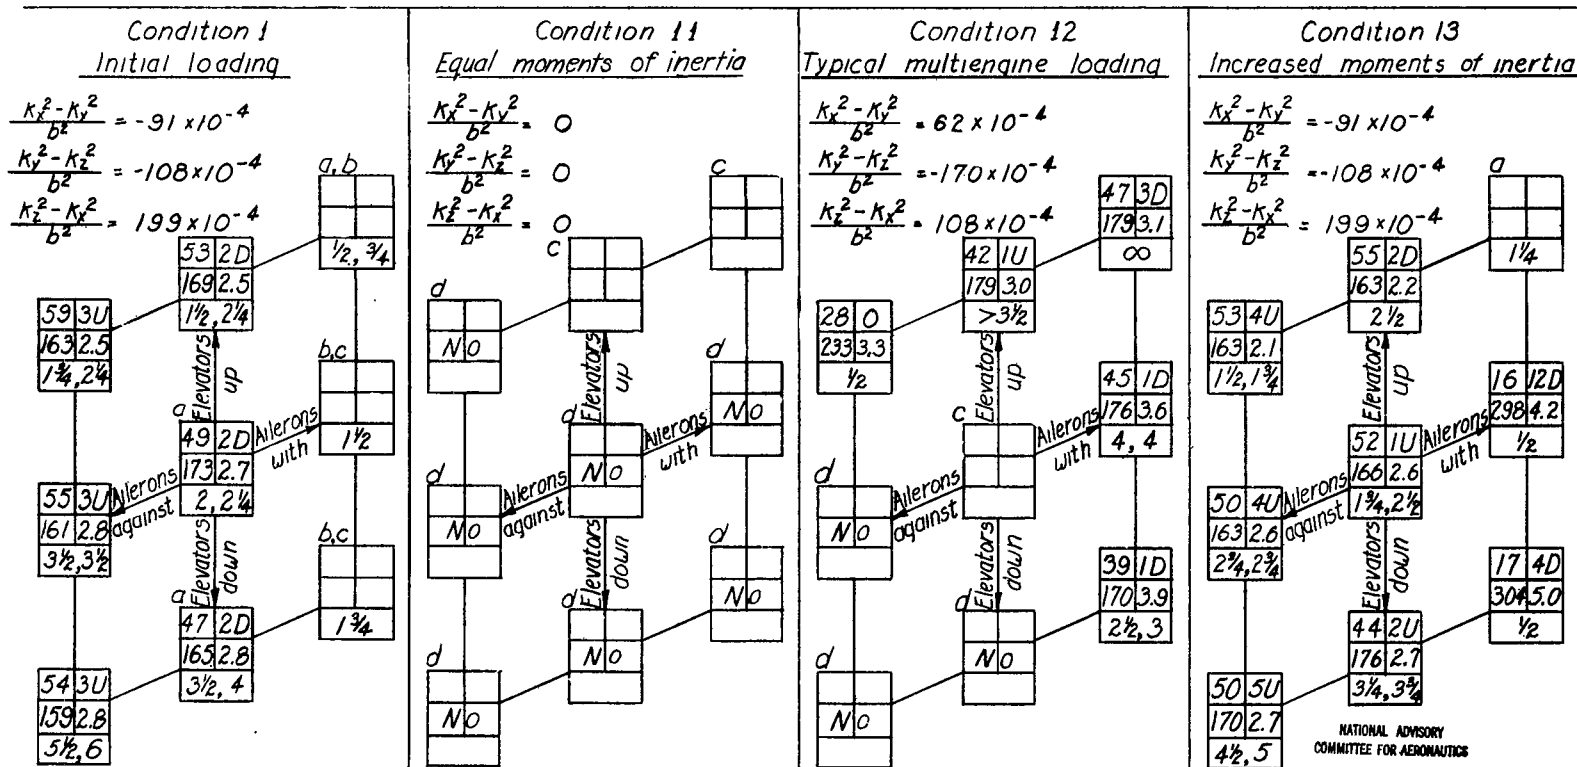d Oscillatory in pitch and roll.
e α and ∅ vary between values indicated.
f No means model would not spin.
g On verge of recovery.
h Model tumbled (rotated about lateral axis)
i Model tumbled after recovery.

Model values converted	α (deg)	∅ (deg)
to corresponding full-scale values.	V (fps)	Ω (rad/sec)
U denotes inner wing up; D, inner wing down.	Turns for recovery	

Chart 2 (Cont.)

Chart 2
(Conc.)

CHART 2.- SPIN CHARACTERISTICS OF MODEL B - Concluded

[Effect of special loading conditions; loading as indicated; cockpit closed; landing gear retracted; flaps neutral; recovery by full rapid rudder reversal; recovery attempted from and steady-spin data presented for rudder-with spin; right erect spins]

Condition 1
Initial loading

$$\frac{K_X^2 - K_Y^2}{b^2} = -91 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = -108 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 199 \times 10^{-4}$$

Condition 11
Equal moments of inertia

$$\frac{K_X^2 - K_Y^2}{b^2} = 0$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = 0$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 0$$

Condition 12
Typical multiengine loading

$$\frac{K_X^2 - K_Y^2}{b^2} = 62 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = -170 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 108 \times 10^{-4}$$

Condition 13
Increased moments of inertia

$$\frac{K_X^2 - K_Y^2}{b^2} = -91 \times 10^{-4}$$
$$\frac{K_Y^2 - K_Z^2}{b^2} = -108 \times 10^{-4}$$
$$\frac{K_Z^2 - K_X^2}{b^2} = 199 \times 10^{-4}$$

a Wandering spin.
b Recovery was attempted before model reached final attitude.
c Steep spin.
d No means model would not spin.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Model values converted to corresponding full-scale values. U denotes inner wing up; D, inner wing down.	α (deg)	ϕ (deg)
	V (fps)	Ω (rad/sec)
	Turns for recovery	

Fig. 1

Figure 1.- Conditions tested with models A and B and ranges of inertia moment parameters for investigations described in references 1 to 3.
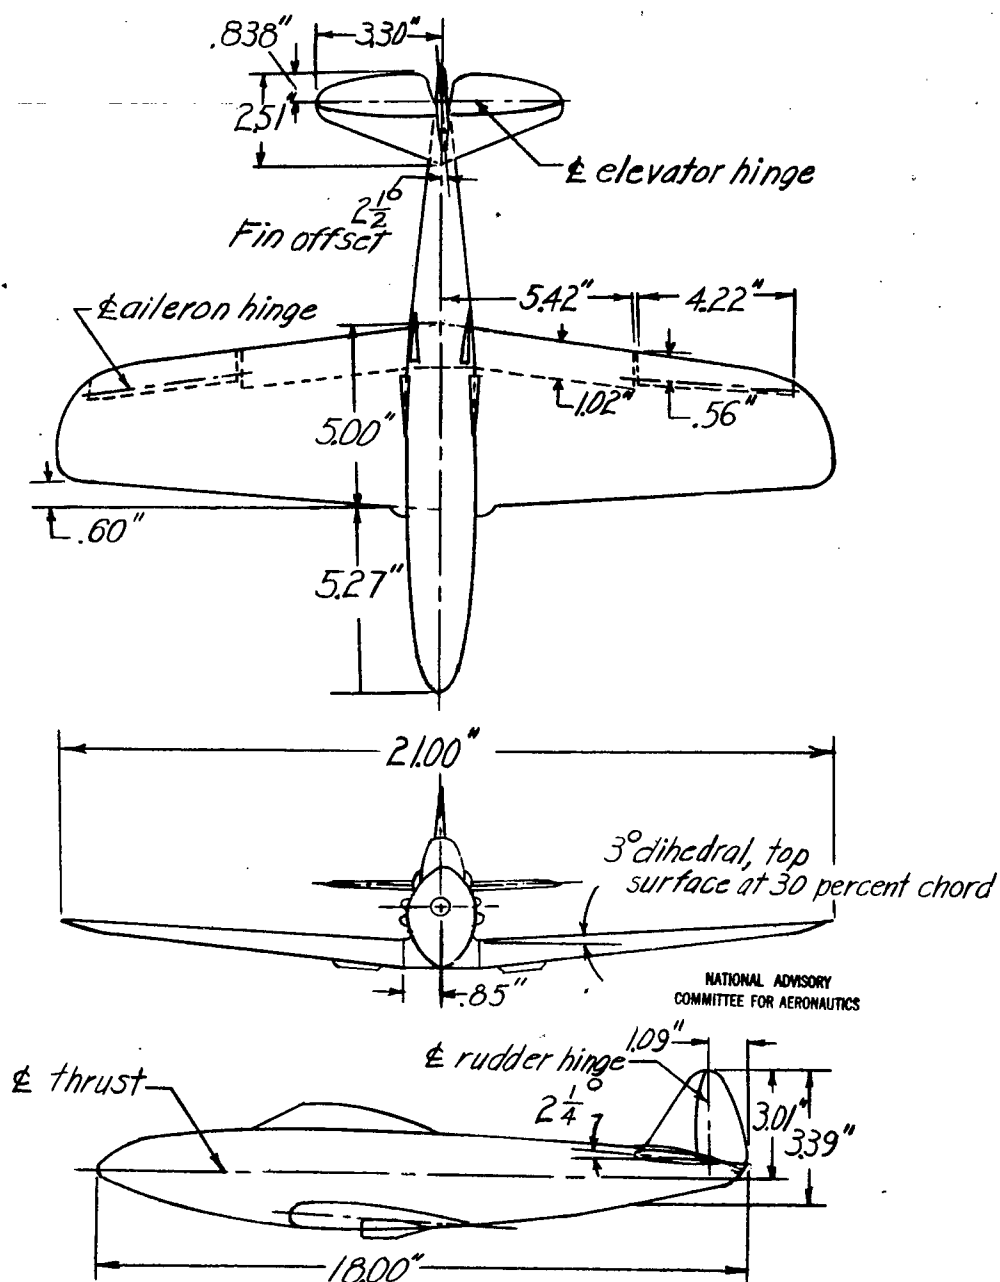
Fig. 2

NACA ARR No. L5C09

Figure 2.— The $\frac{1}{18}$-scale model of airplane A
as tested in the Langley 15-foot and 20-foot
free-spinning tunnels.

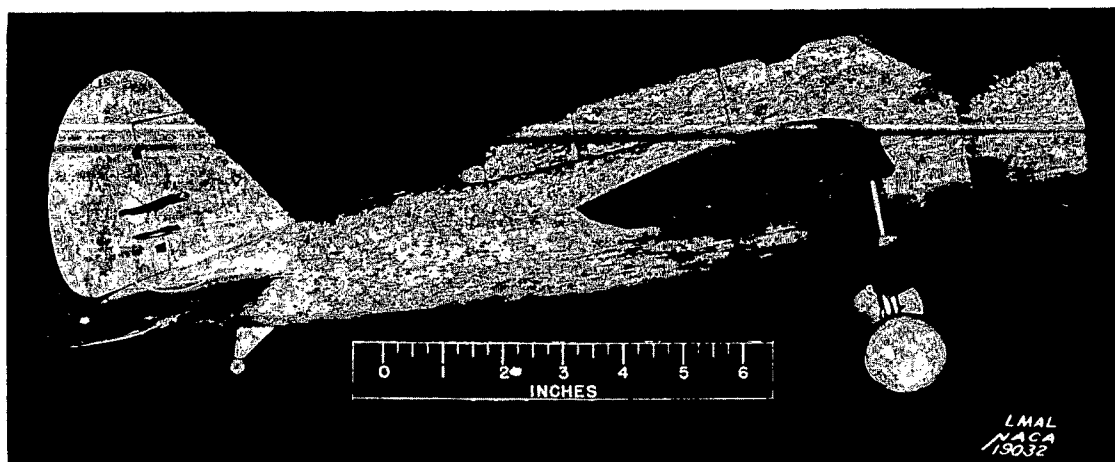.838"   .330"

2.51

$2\frac{16}{2}$
Fin offset

₵ elevator hinge

₵ aileron hinge

5.42"   4.22"

5.00"

1.02"   .56"

.60"

5.27"

21.00"

3° dihedral, top
surface at 30 percent chord

.85"

₵ rudder hinge   1.09"

₵ thrust

$2\frac{1}{4}$ 3.01"   3.39"

18.00"

Figure 3.- The $\frac{1}{20}$-scale model of airplane B
as tested in the Langley 15-foot and 20-foot
free-spinning tunnels.

Figure 4.- Side view of model A.
Tests made with landing gear
retracted.
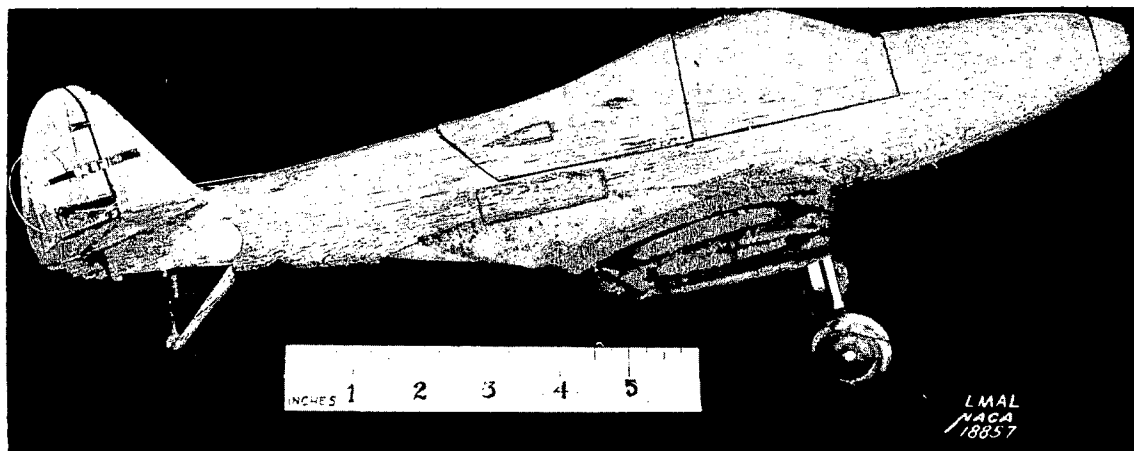
Figure 5.- Side view of model B.
Tests made with landing gear
retracted.

Fig. 6
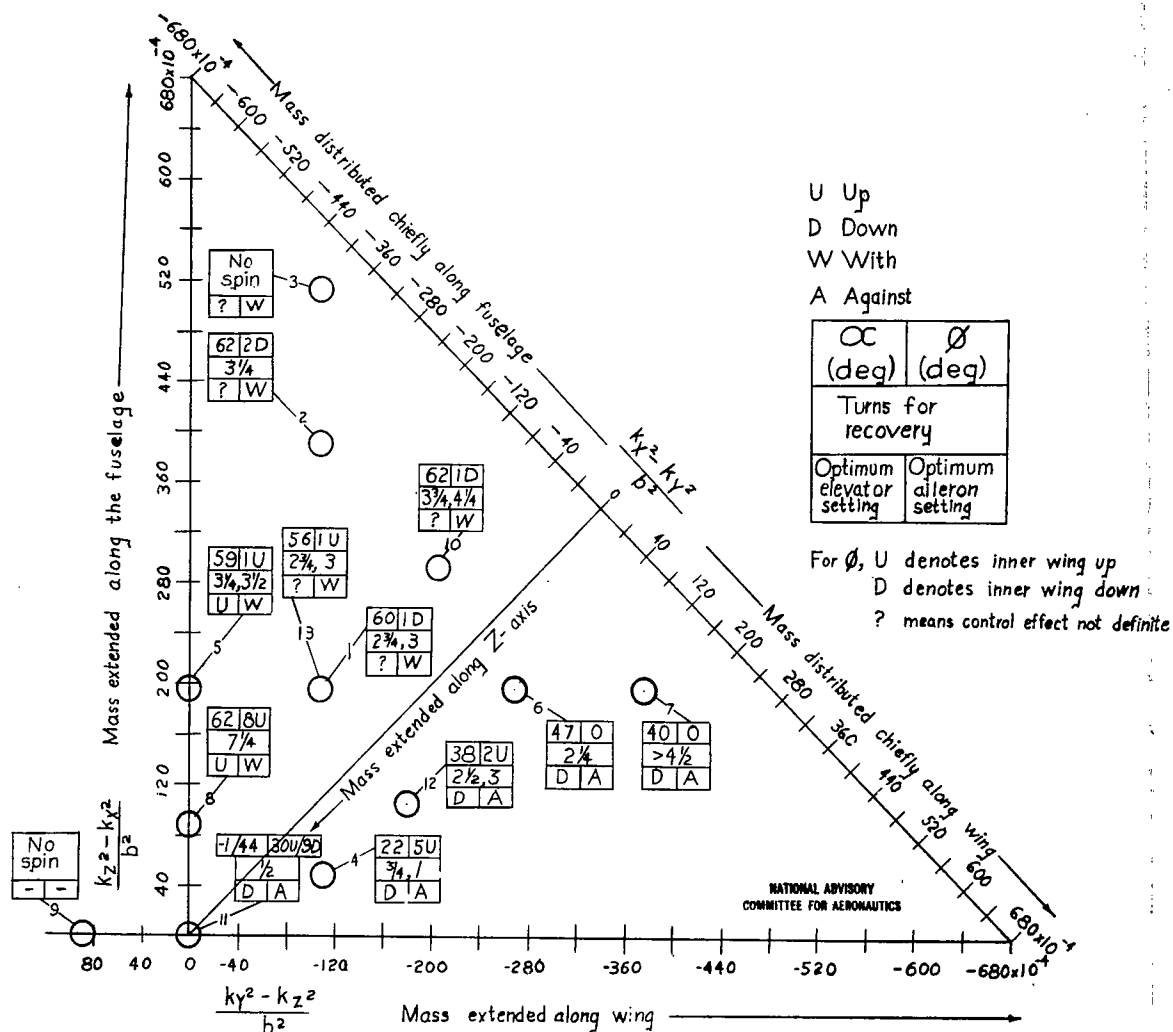
Figure 6.— A simplified presentation of the results obtained with model A. ∝, ∅, and turns for recovery are given for the spin at the normal spinning control configuration (ailerons neutral, elevators up, rudder with).
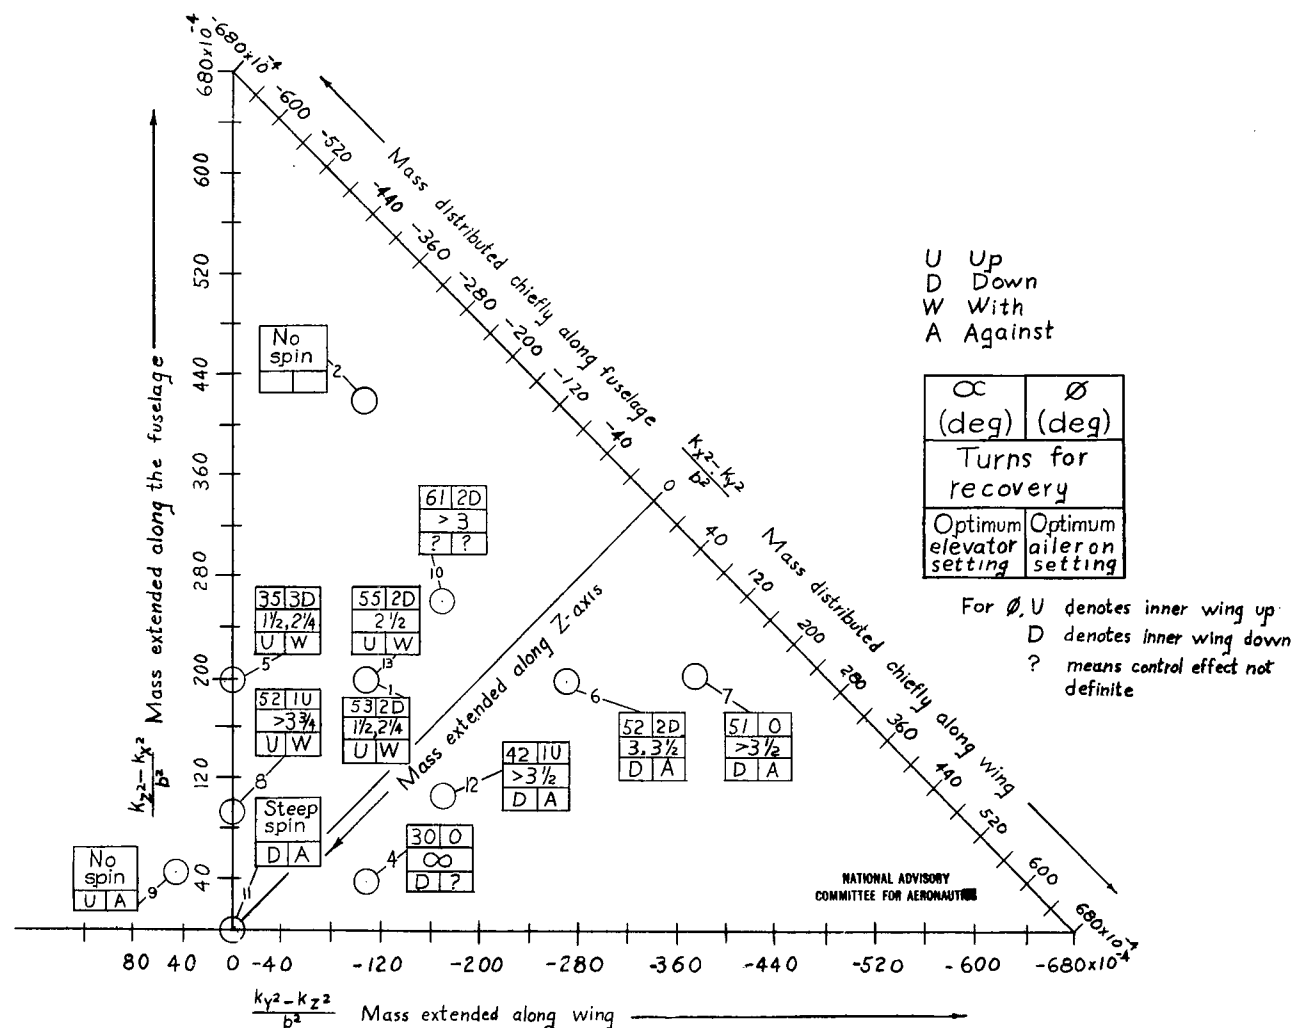
Fig. 7

Figure 7.- A simplified presentation of the results obtained with model B.
$\propto$, $\emptyset$, and turns for recovery are given for the spin at the normal
spinning control configuration (ailerons neutral, elevators up, rudder with).